

SJP SERIES SELF-PRIMING PUMPS

Self-Priming Centrifugal Pumps

SJP Series

The SJP Series self-priming centrifugal pumps are designed so they can be installed above the water line to provide suction lift as well as boost incoming pressure up to 50 PSI.

The quality and performance you expect, along with industry best lead times and personalized service, only from Webtrol!



Features and Benefits

- 304 stainless steel pump
- Close coupled design
- Centerline discharge
- Non-overloading motor rated for continuous duty
- Back pullout design for ease of servicing
- Mechanical seal for maximum reliability

Performance

HP Range: .33 HP, 60Hz

Capacities to 15 GPM

Pressures to 50 PSI boost


Temperatures to 104° F

Typical Services

- Home drinking water booster systems
- Deionized Systems
- Misting Systems
- Car Wash Systems
- Liquid Transfer Systems
- Circulation Systems
- Pre-Filter Charge System
- Condensation Systems
- Cooling Tower Systems

SJP Series

SJP CENTRIFUGAL PUMP Performance Curve & Dimensions

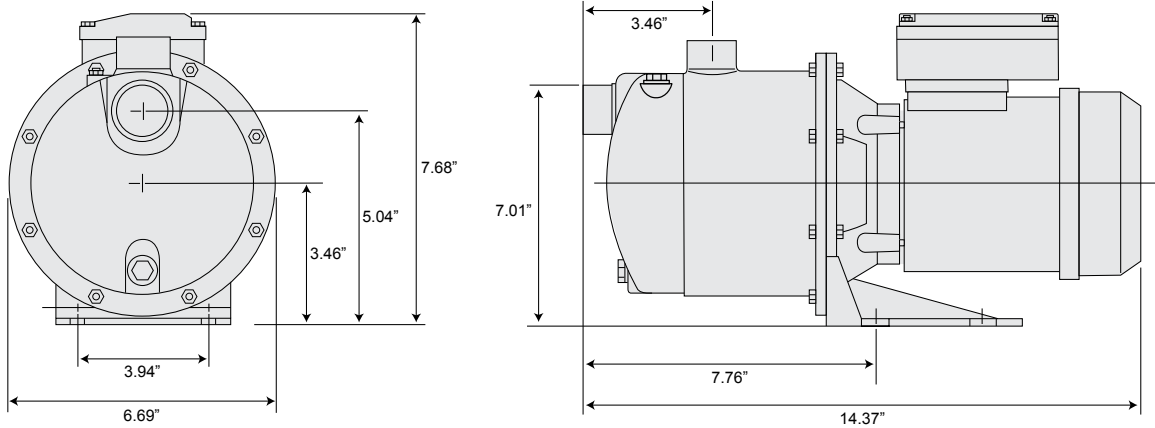

CONSTRUCTION MATERIALS	
Part	Material
Pump Housing	304 SS
Back Plate	304 SS
Impeller (closed type)	304 SS
Motor Shaft	Stainless Steel
Mechanical Seal	Carbon/Ceramic



There when you need us most

(800) 769-7867

8417 New Hampshire Ave. | St. Louis, MO 63123

Web: webtrol.com | **E-mail:** customerservice@webtrol.com | **Fax:** (314) 631-3738

WEBTROL is a Division of Weber Industries, Inc.