


## 4" SUBMERSIBLE CURVES

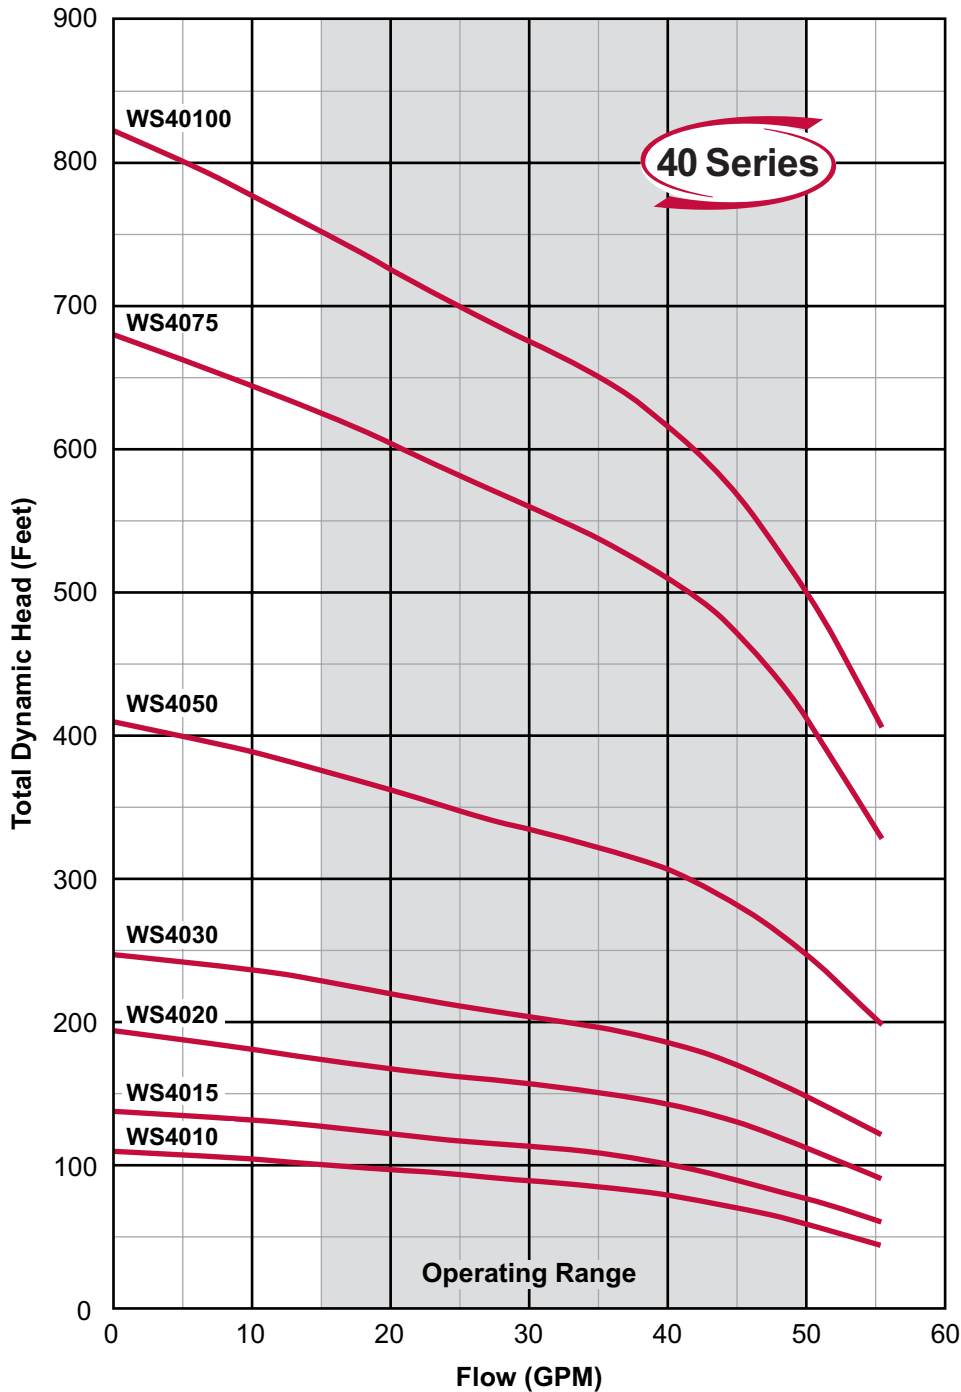

**MODEL NO.:** WS40752C3

Series/Nominal Rated Flow (GPM) \_\_\_\_\_

Horsepower \_\_\_\_\_  
Divide by 10 for Rated Motor Horsepower  
(Example 75 ÷ 10 = 7.5 or 7.5HP)

Voltage \_\_\_\_\_  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control \_\_\_\_\_  
Blank = 2 wire C = Optional Control

Phase (PH) \_\_\_\_\_  
Blank = 1PH 3 = 3PH

PEI<sub>CL</sub>: 0.99 Impeller Dia.: 2.92 (in.)

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.