




There when you need us most

## 8" SUBMERSIBLE TURBINE CURVES

# WS Series

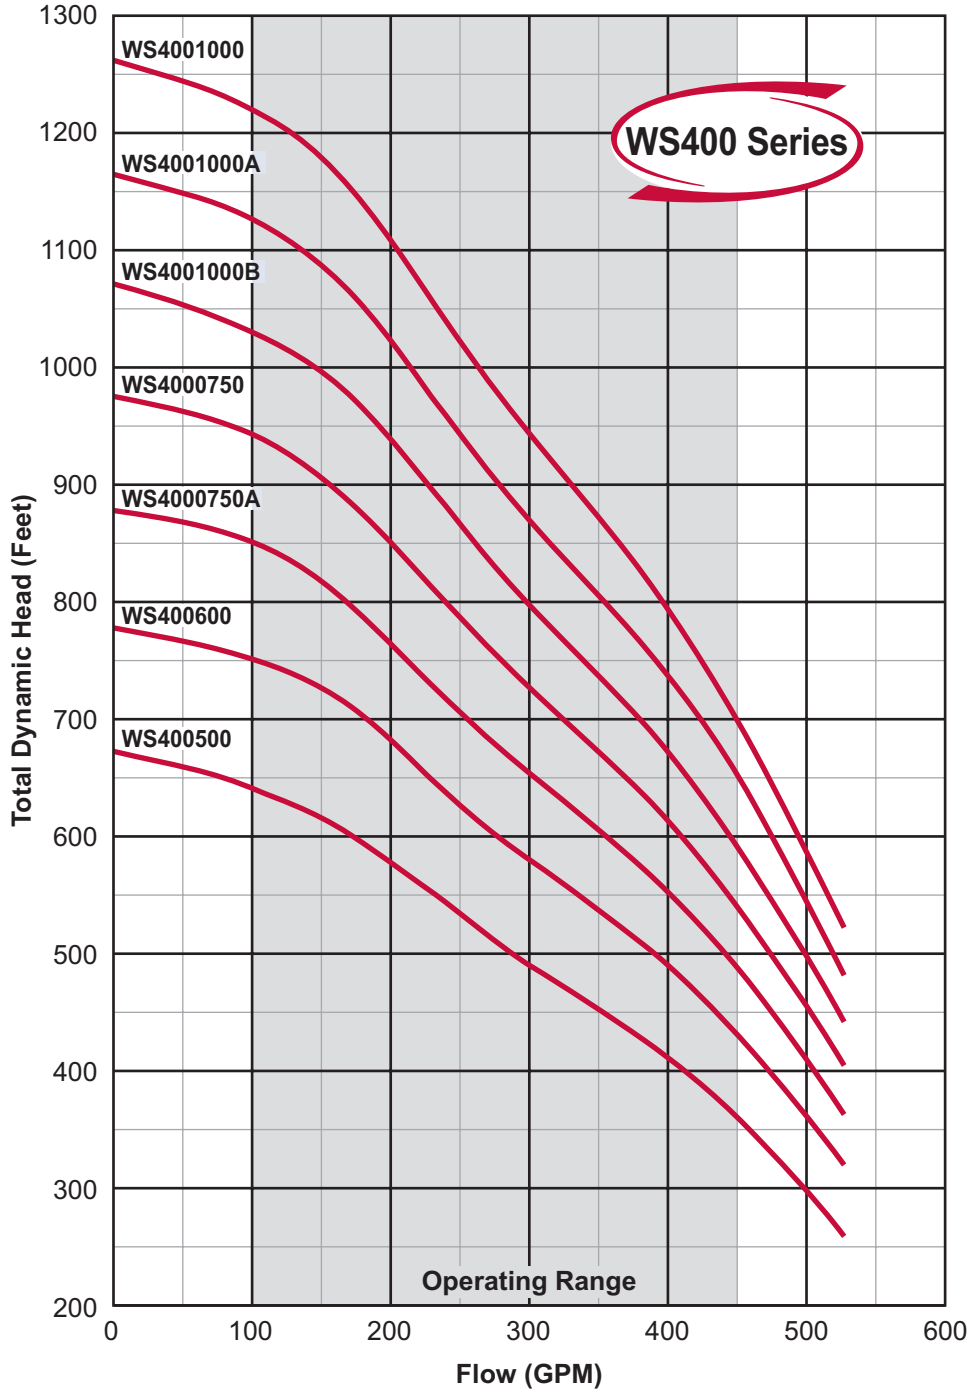

MODEL NO.	HP	STAGES
WS400500**	50.0	7
WS400600**	60.0	8
WS4000750A*	75.0	9
WS4000750*	75.0	10
WS4001000B*	100.0	11
WS4001000A*	100.0	12
WS4001000*	100.0	13

\*\*6" motor bracket  
\*8" motor bracket

**MODEL NO.: WS4000750A4C3**

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower  
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.