




There when you need us most

# WS Series

## 4" SUBMERSIBLE CURVES

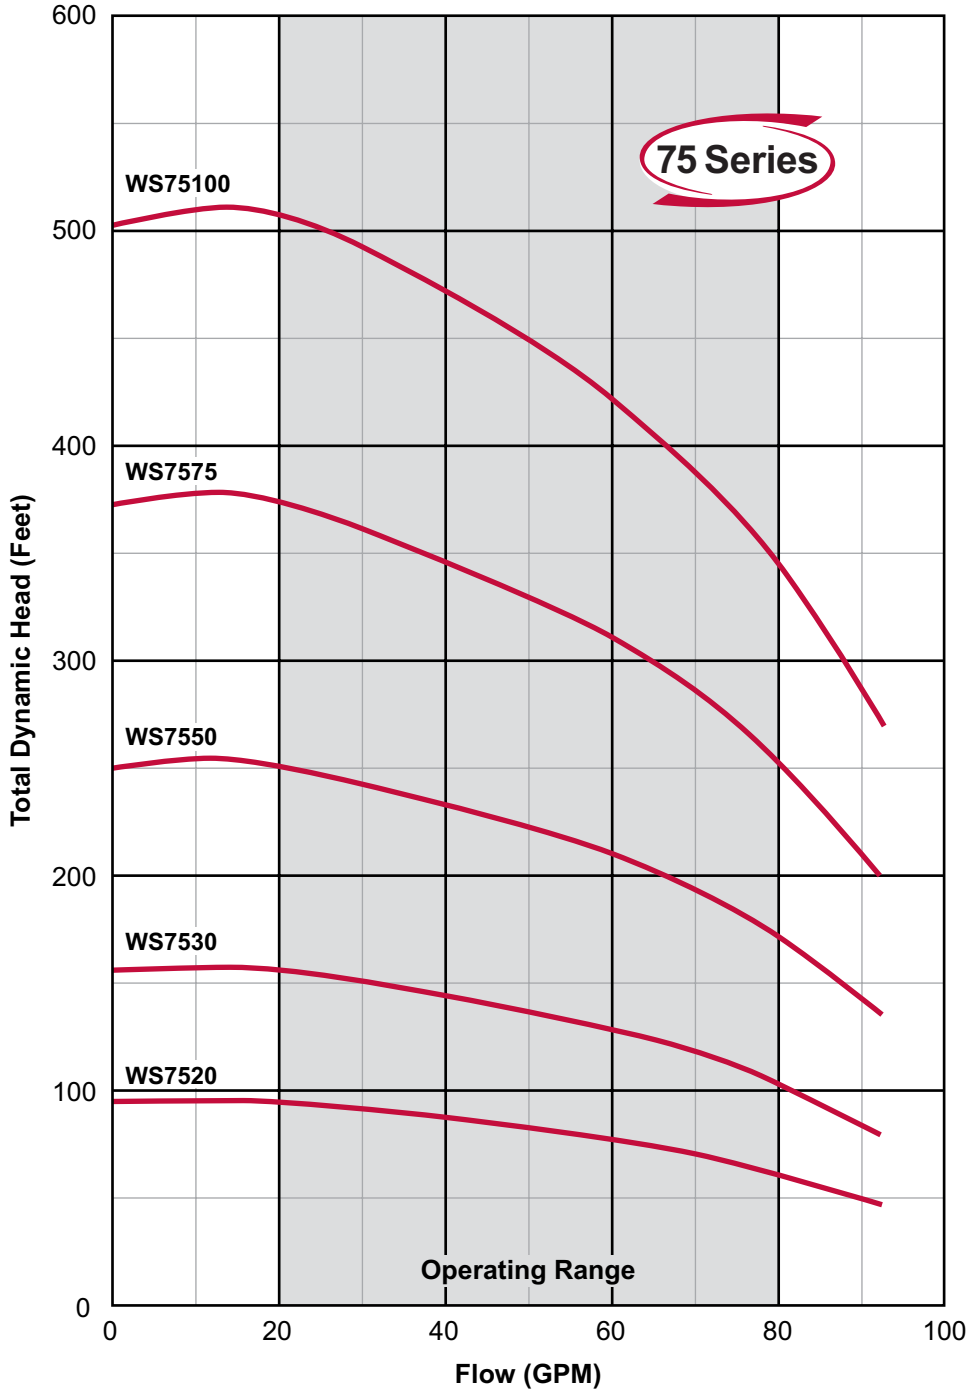

**MODEL NO.:** WS75752C3

**Series/Nominal Rated Flow (GPM)** \_\_\_\_\_

**Horsepower** \_\_\_\_\_  
Divide by 10 for Rated Motor Horsepower  
(Example 30 ÷ 10 = 3.0 or 3HP)

**Voltage** \_\_\_\_\_  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

**Wire/Control** \_\_\_\_\_  
Blank = 2 wire C = Optional Control

**Phase (PH)** \_\_\_\_\_  
Blank = 1PH 3 = 3PH

PEI<sub>CL</sub>: .94 Impeller Dia.: 2.92 (in.)

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.