




There when you need us most

WS Series

6" SUBMERSIBLE CURVES

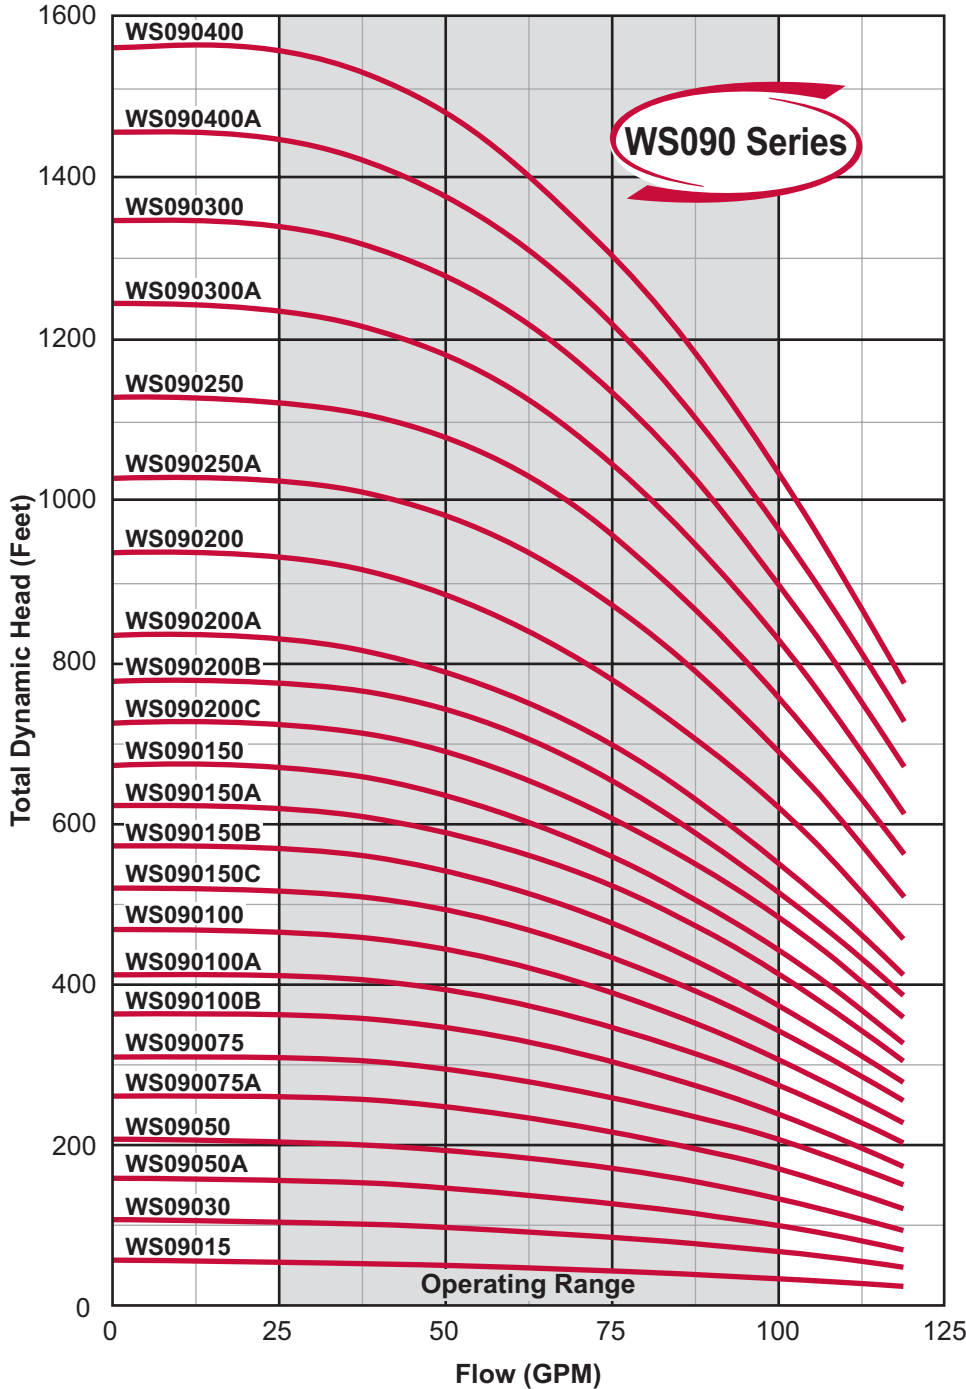

MODEL NO.	HP	STAGES
WS09015*	1.5	1
WS09030*	3.0	2
WS09050A*	5.0	3
WS09050*	5.0	4
WS090075A**	7.5	5
WS090075**	7.5	6
WS090100B**	10.0	7
WS090100A**	10.0	8
WS090100**	10.0	9
WS090150C**	15.0	10
WS090150B**	15.0	11
WS090150A**	15.0	12
WS090150**	15.0	13
WS090200C**	20.0	14
WS090200B**	20.0	15
WS090200A**	20.0	16
WS090200**	20.0	18
WS090250A**	25.0	20
WS090250**	25.0	22
WS090300A**	30.0	24
WS090300**	30.0	26
WS090400A**	40.0	28
WS090400**	40.0	30

*4" motor bracket
**6" motor bracket

MODEL NO.: WS090200B2C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

PEI_{CL}: 0.87 Impeller Dia.: 3.51 (in.)

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.