




There when you need us most

## 6" SUBMERSIBLE CURVES

# WS Series

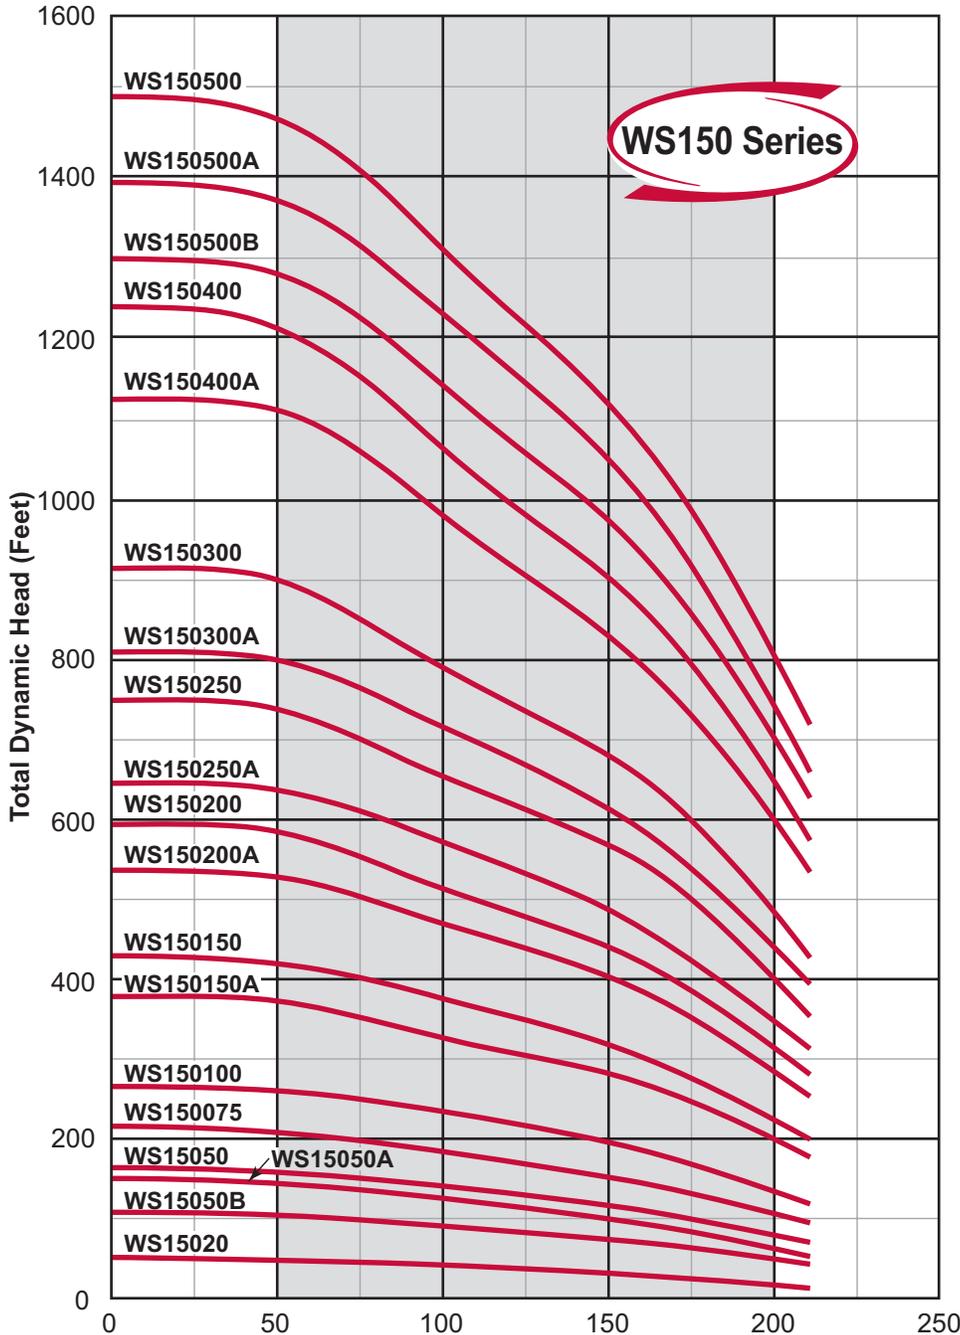

MODEL NO.	HP	STAGES
WS15020*	2.0	1
WS15050B*	5.0	2
WS15050A*	5.0	3A
WS15050*	5.0	3
WS150075**	7.5	4
WS150100**	10.0	5
WS150150A**	15.0	7
WS150150**	15.0	8
WS150200A**	20.0	10
WS150200**	20.0	11
WS150250A**	25.0	12
WS150250**	25.0	14
WS150300A**	30.0	15
WS150300**	30.0	17
WS150400A**	40.0	21
WS150400**	40.0	23
WS150500B**	50.0	24
WS150500A**	50.0	26
WS150500**	50.0	28

\*4" motor bracket  
\*\*6" motor bracket

**MODEL NO.: WS150200A2C3**

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

PEI<sub>CL</sub>: 0.90 Impeller Dia.: 3.78 (in.)

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.