




There when you need us most

## 6" SUBMERSIBLE CURVES

# WS Series

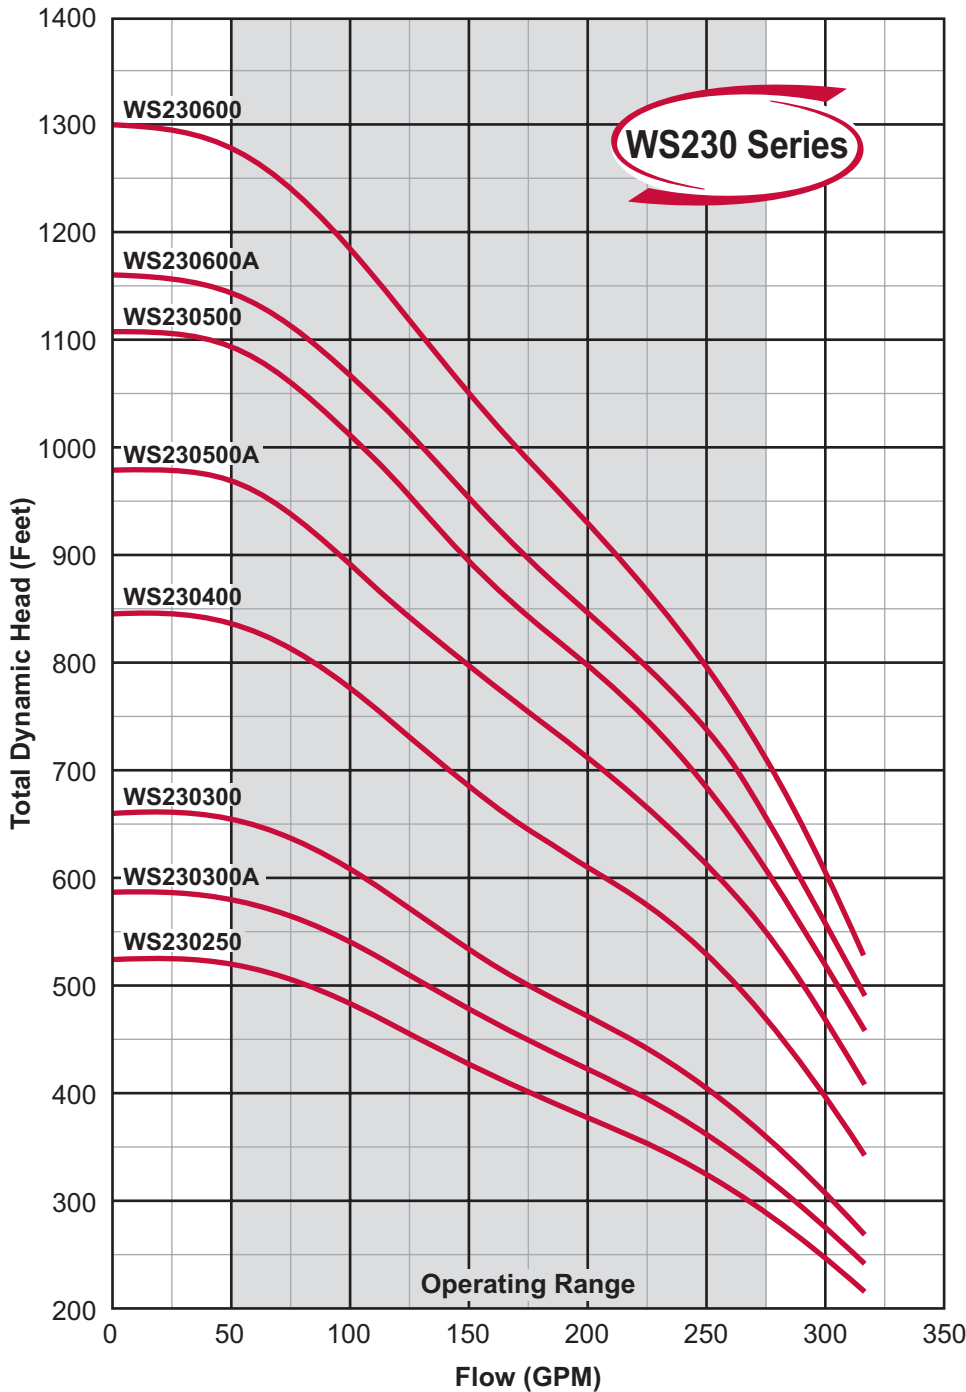

| MODEL NO.   | HP   | STAGES |
|-------------|------|--------|
| WS230250**  | 25.0 | 8      |
| WS230300A** | 30.0 | 9      |
| WS230300**  | 30.0 | 10     |
| WS230400**  | 40.0 | 13     |
| WS230500A** | 50.0 | 15     |
| WS230500**  | 50.0 | 17     |
| WS230600A** | 60.0 | 18     |
| WS230600**  | 60.0 | 20     |

\*\*6" motor bracket

**MODEL NO.: WS230300A4C3**

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

PEI<sub>CL</sub>: 0.88 Impeller Dia.: 4.14 (in.)

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.