




There when you need us most

WS Series 10" SUBMERSIBLE TURBINE CURVES

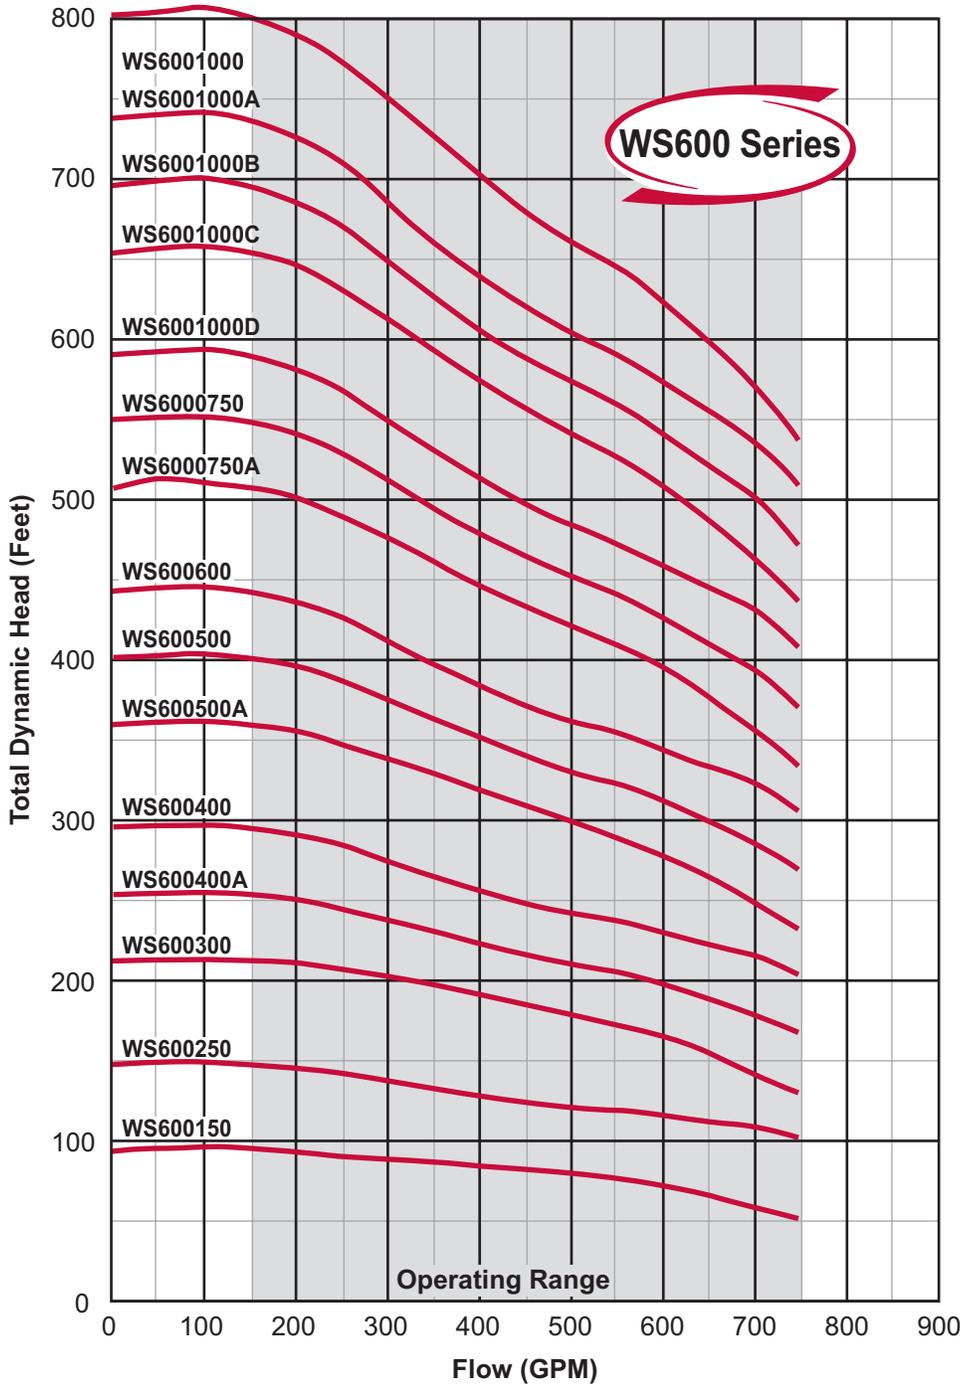

MODEL NO.	HP	STAGES
WS600150**	15.0	1-A
WS600250**	25.0	1
WS600300**	30.0	2-AA
WS600400A**	40.0	2-A
WS600400**	40.0	2
WS600500A**	50.0	3-AA
WS600500**	50.0	3-A
WS600600**	60.0	3
WS6000750A*	75.0	4-AA
WS6000750*	75.0	4-A
WS6001000D*	100.0	4
WS6001000C*	100.0	5-AA
WS6001000B*	100.0	5-A
WS6001000A*	125.0	5
WS6001000*	125.0	6-AA

**6" motor bracket
*8" motor bracket

MODEL NO.: WS600400A4C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower
(Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.