




There when you need us most

# WS Series 10" SUBMERSIBLE TURBINE CURVES

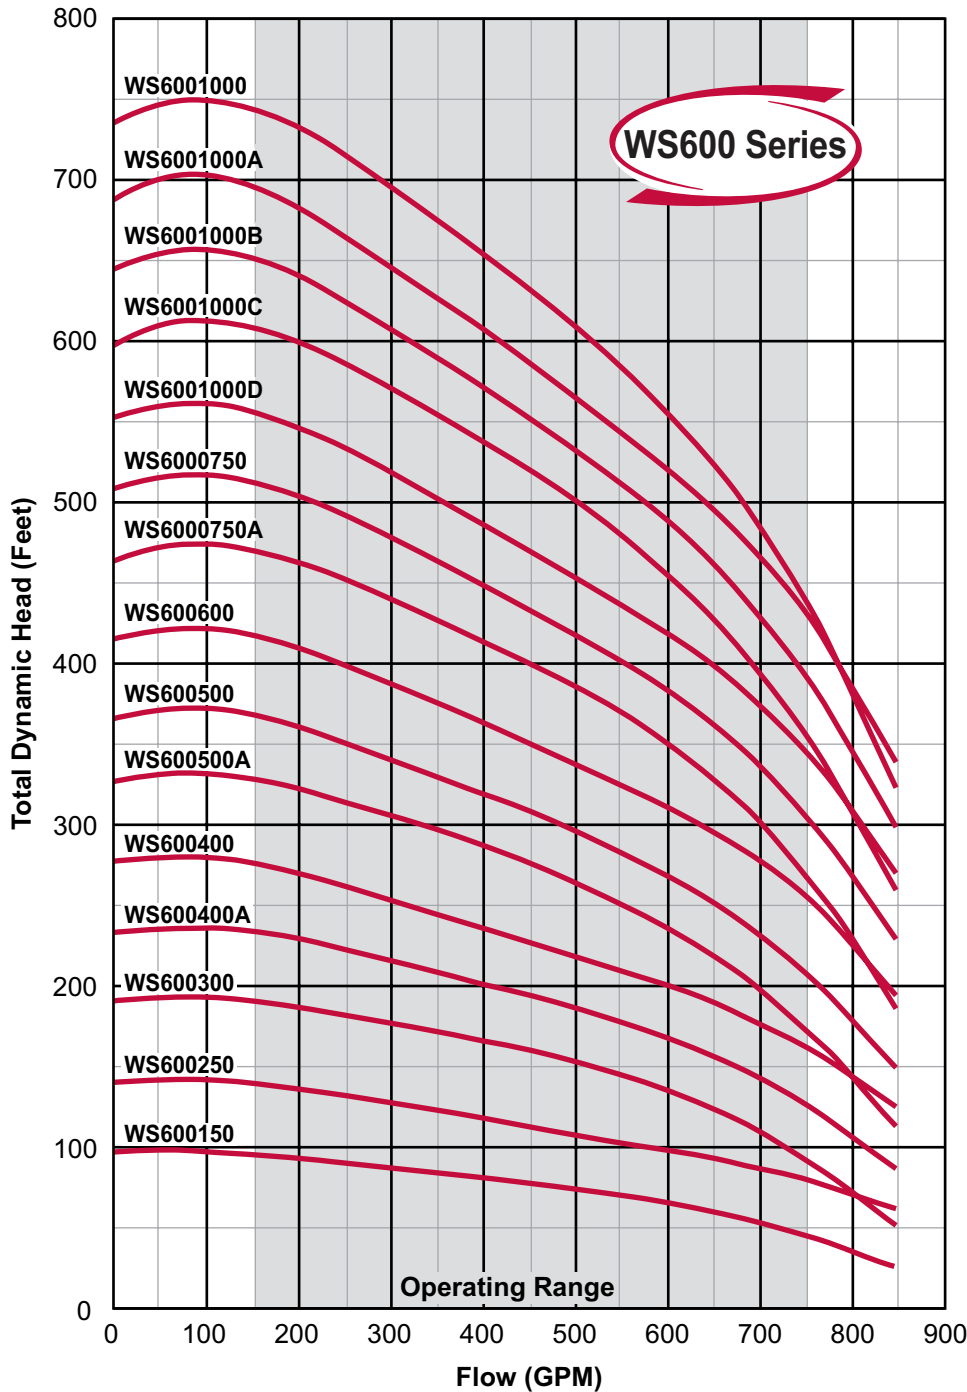

MODEL NO.	HP	STAGES
WS600150	15.0	1-A
WS600250	25.0	1
WS600300	30.0	2-AA
WS600400A	40.0	2-A
WS600400	40.0	2
WS600500A	50.0	3-AA
WS600500	50.0	3-A
WS600600	60.0	3
WS6000750A	75.0	4-AA
WS6000750	75.0	4-A
WS6001000D	100.0	4
WS6001000C	100.0	5-AA
WS6001000B	100.0	5-A
WS6001000A	100.0	5
WS6001000	100.0	6-AA

### MODEL NO.: WS600400A4C3

Series/Nominal Rated Flow (GPM)

Horsepower  
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage  
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control  
Blank = 2 wire C = Optional Control

Phase (PH)  
Blank = 1PH 3 = 3PH

**Note:**

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.