




There when you need us most

10" SUBMERSIBLE TURBINE CURVES

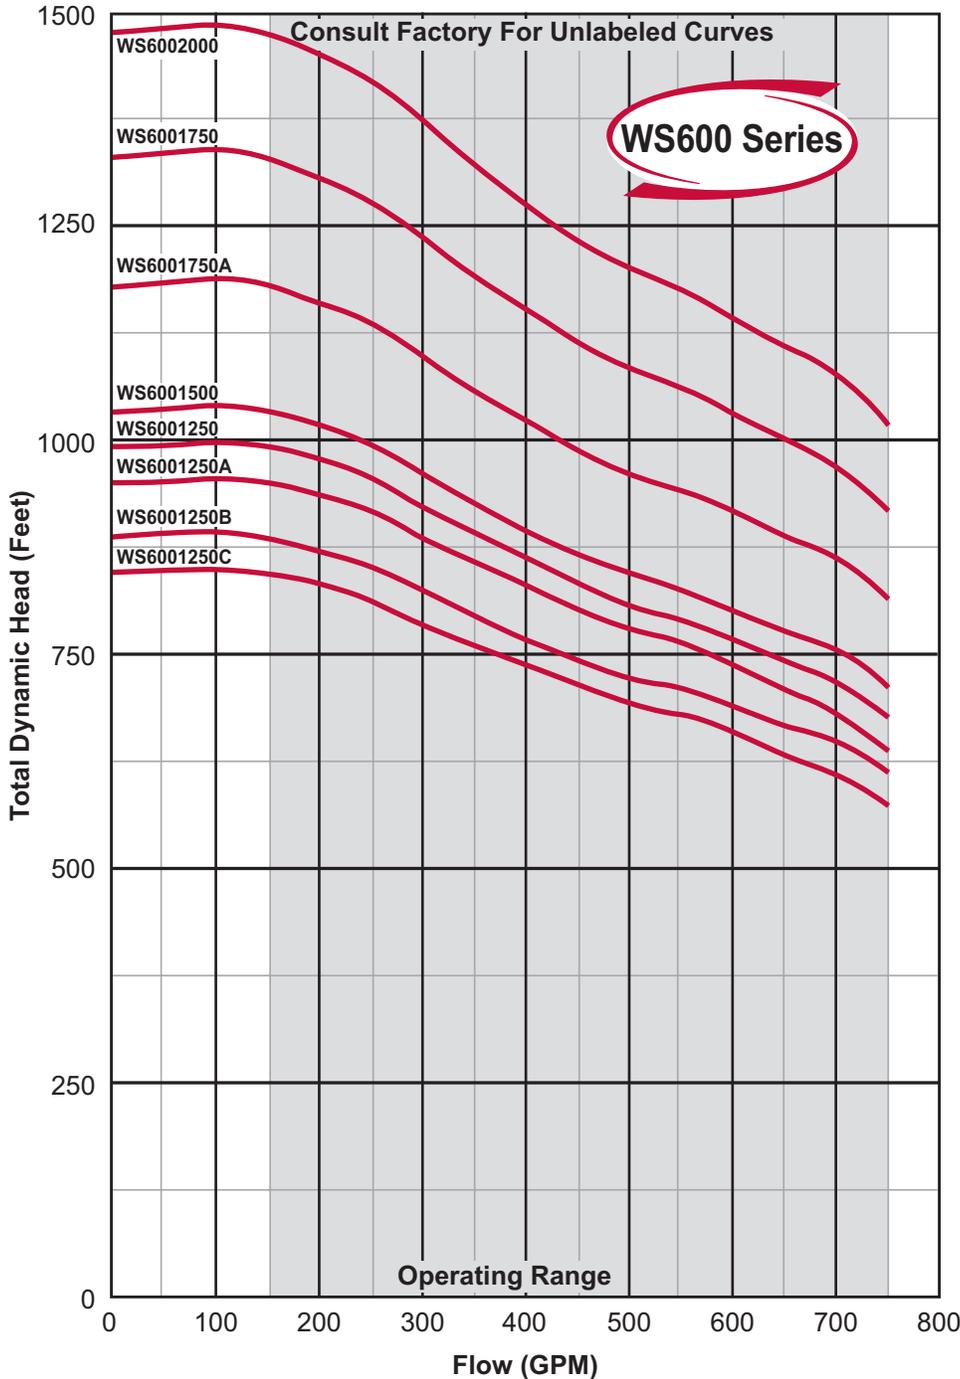

MODEL NO.	HP	STAGES
WS6001250C*	125.0	6-A
WS6001250B*	125.0	6
WS6001250A*	125.0	7-AA
WS6001250*	125.0	7-A
WS6001500*	150.0	7
WS6001750A*	175.0	8
WS6001750*	175.0	9
WS6002000*	200.0	10

*8" motor bracket

MODEL NO.: WS6001250C4C3

Series/Nominal Rated Flow (GPM)

Horsepower
Divide by 10 for Rated Motor Horsepower (Example 20 ÷ 10 = 2.0 or 2HP)

Impeller Trim

Voltage
1 = 115V 8 = 200V 2 = 230V 4 = 460V 5 = 575V

Wire/Control
Blank = 2 wire C = Optional Control

Phase (PH)
Blank = 1PH 3 = 3PH

Note:

These curves are based on factory tests when pumping clear, fresh, non-aerated water at a temperature not exceeding 85°F. Due to production tolerances, these curves can vary plus or minus five percent.