

EP SERIES STAINLESS STEEL SUMP PUMPS

304 Stainless Steel



The EP Series offer you a complete and comprehensive range of submersible drainage pumps for pumping slurry, dirty and semi-dirty water.

The quality and performance you expect, along with industry best lead times and personalized service, only from Webtrol!



Features and Benefits

- 304 stainless steel construction
- Built in thermal overload with automatic reset
- Air filled, continuous duty rated motor
- Oil lubricated double faced mechanical seal
- 10' power cord on single phase models, 20' cords on three phase models.

Performance

HP Range: .33 - 1.5 HP, 60Hz.

Capacities to 90 GPM


Heads to 62'

Temperatures to 122° F continuous or 140° F intermittent


Typical Services

- Dewatering
- Waterfalls
- Water Transfer
- Fountains
- Sump Applications





EP SERIES STAINLESS STEEL SUMP PUMPS

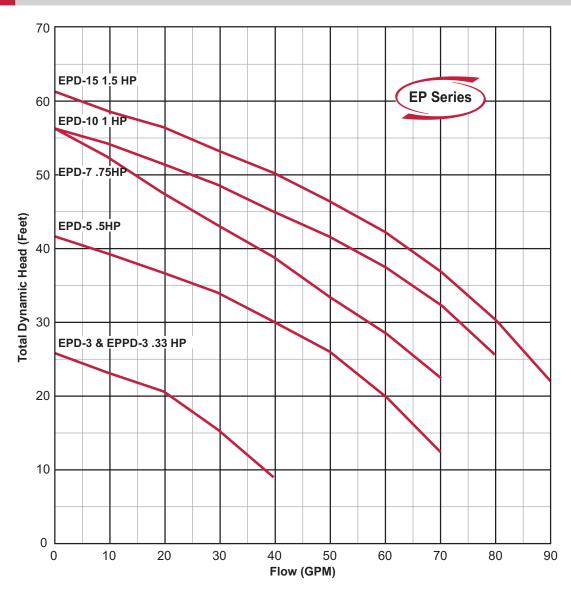

CONSTRUCTION MATERIALS	
Part	Material
Casing	304 SS
Impeller	304 SS
Shaft	303 SS
Motor Frame	304 SS
Fastener	304 SS
Double Shaft Seal - Upper	NBR Fitted Carbon/Ceramic
Double Shaft Seal - Lower	Viton Fitted Silicon Carbide/Silicon Carbide
Bearing	Sealed Ball Bearing