

HT SERIES BOOSTER PUMPS





The Webtrol HT Series is the *original* heavy duty booster pump designed for high flow at high head to meet the demands of industrial, commercial, and agricultural applications.

Features and Benefits

- Heavy duty 7/8" diameter stainless steel shaft with a double keyway
- · Glass filled Noryl impellers
- Injection molded, Polycarbonate, or Noryl diffusers with stainless steel wear rings

Performance

HP Range: 5 to 40 HP, 60Hz Capacities to 100 GPM Pressures to 780 PSI Temperatures to 180° F The quality and performance you expect, along with industry best lead times and personalized service, only from Webtrol!

Typical Services


- · Reverse Osmosis
- Deionization
- · Car Wash
- Washdown
- · Water Boosting

August 2019 webtrol.com



There when you need us most

HT SERIES BOOSTER PUMPS

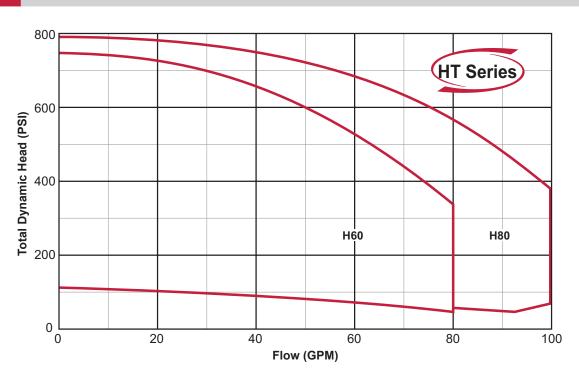

CONSTRUCTION MATERIALS		
Part	Cast Iron	SS
Inlet/Motor Bracket	Cast Iron	316 SS
Discharge Housing	Steel	316 SS
Pump Housing	304 SS Tubing	316 SS Tubing
Impellers	Noryl	Noryl
Diffusers	Noryl	Noryl
Wear Rings	316 SS	316 SS
Shaft & Coupling	316 SS / 416 SS	316 SS
Shaft Bearing Sleeve	316 SS	316 SS
Shaft Bearing	Bronze	Rulon
Mechanical Seal	Carbon/Ceramic 302 SS, Buna-N	Carbon/Ceramic 316 SS, Viton
Mechanical Seal Spacer	416 SS	316 SS
O-Rings	Buna-N	Viton